

## Technical Data      AQ37I1

### Performances\*

		<b>B0W35</b>	<b>B0W55</b>	<b>W10W35</b>	<b>W10W55</b>	<b>B-5W35</b>
Heating Capacity	kW	10,52	9,62	14,16	12,57	7,75
Cooling Capacity	kW	8,42	6,67	12,05	9,42	5,63
Power In**	kW	2,25	3,10	2,26	3,30	2,27
COP	-	4,68	3,10	6,28	3,81	3,42
Operating Current	A	10,9	15,0	10,9	15,9	11,0

### Compressor

Type	BLDC Inverter	
Speed	20-100	rps
Charge POE oil	0,95	l
LRC***	-	A
Max. Op. Current	16	A

### Evaporator

Type	PHE	
Material	AISI316	
Water Flow (W/W)	1,44	kg/s
Minimum Flow	1,08	kg/s
Brine Flow (B/W)	0,67	kg/s
Minimum Flow	0,40	kg/s
Temp. Difference	3	K
Internal Volume	5,1	l
Max. Water Overp.	250	kPa
Max. Ref. Overp.	4,20	MPa
Pump Ext. Head	5,0	m
Pump Motor	130	W

### Condenser

Type	PHE	
Material	AISI316	
Water Flow	0,46	kg/s
Minimum Flow	0,35	kg/s
Temp. Difference	5,0	K
Internal Volume	4,1	l
Max. Water Overp.	250,0	kPa
Max. Ref. Overp.	4,2	MPa
Pump Ext. Head	5,0	m
Pump Motor	70,0	W

### Refrigerant Circuit

Refrigerant	R410a	
Charge	1,5	kg

### Aux. Heater (Option)

Heating Capacity	6	kW
------------------	---	----

### Controls

Controller	pCO5	
EEV	Yes	
Water Probe	Yes	
SHW Probe/Output	Yes	
Mixing Probe/Output	Yes, 2x	
Outdoor Probe	Yes	
Dynamic Set Point	Yes	
Refrigerant Probe	2xPT	

### Power Supply

Voltage	1x230V	V
Frequency	50	Hz
Max. Current	32	A

### Connections and Dimensions

Hot Water, Brine	1"	"OD
He x Wi x De	120x56x72	cm
Weight	165	kg

### Limits

W/B Overpressure	0,25	MPa
Ref. Overpressure	4,2	MPa
Brine Min/Max	-5/+20	°C
Water Min/Max	20/60	°C

\*B0W35, acc. to EN14511, at 60rps

"B0"      Brine Inlet 0°C

"W35"      Water Outlet 35°C


Performance Tolerance EN14511

\*\* **Effective Power acc. to EN14511**

\*\*\* Locked Rotor Current

## Technical Data AQ3711

### Performance \*

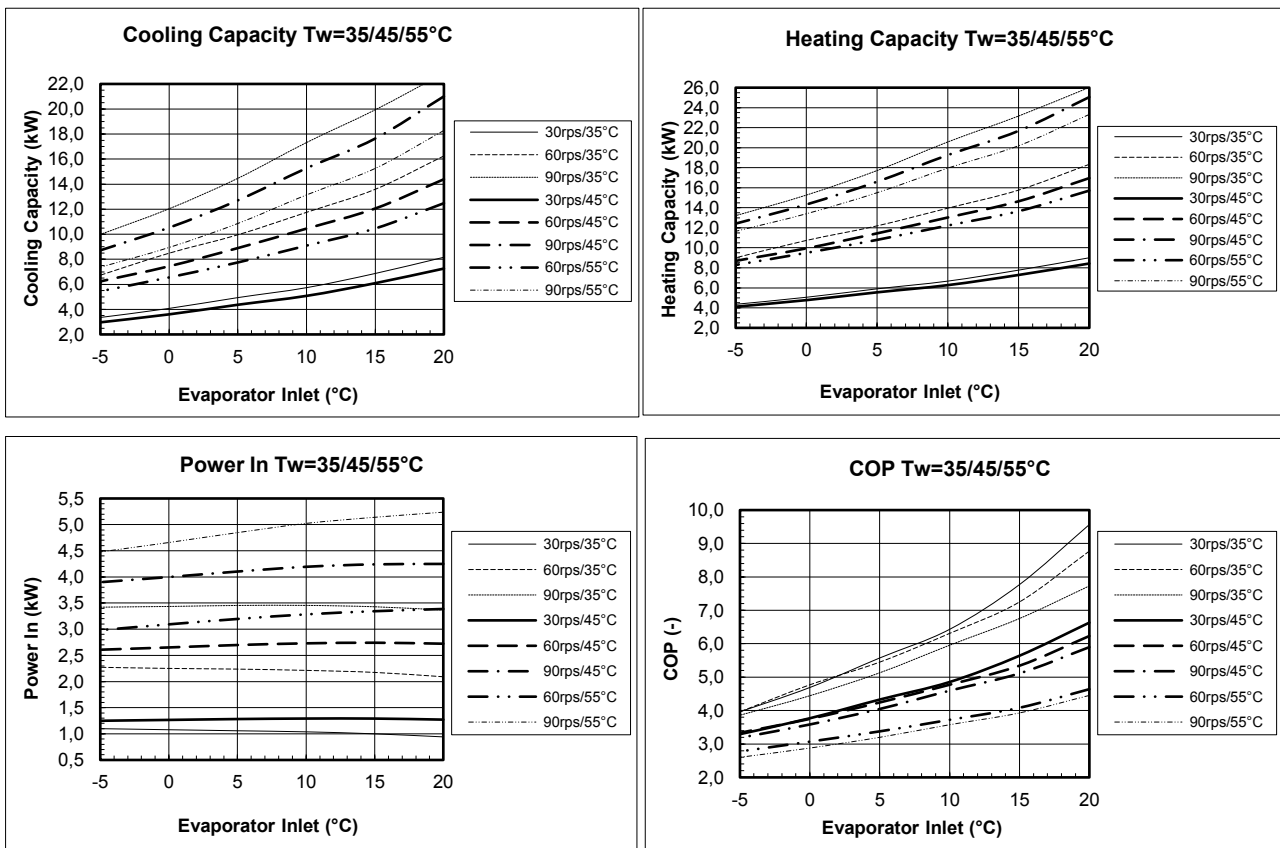

\* Performance Tolerance  $\pm 10\%$

### Dimensions, Connections

1. Water / Brine Inlet 1" OD
2. Water / Brine Outlet 1" OD
3. Hot Water Outlet 1" OD
4. Hot Water Inlet 1" OD
5. 2xPG16, 4xPG13.5

